



# **XCOMP**

**PERFORMANCE TIRES**

**HIGH PERFORMANCE TIRE CATALOG**

**2025**

**WE DIDN'T INVENT TIRES,  
WE JUST MAKE THEM BETTER.®**







**XCOMP**  
PERFORMANCE TIRES

*FROM THE INITIAL STAGES OF DEVELOPMENT, THE ENTIRE X COMP® LINEUP HAD 1 GOAL: MEET AND EXCEED THE HIGHEST PERFORMANCE STANDARDS OF THE MOTORSPORTS COMMUNITY.*

**RACE  
PROVEN  
TIRES**

**PERFORMANCE GUARANTEED®**

**H/P** | FRONT: 265/35ZR21 REAR: 325/30ZR21



# XCOMP H/P

THE H/P STREET TIRE WAS DESIGNED TO EXCEED THE EXPECTATIONS OF VARIOUS APPLICATIONS INCLUDING STREET DRIVING, TRACK DAYS, AND DRIFTING.

## **HIGH PERFORMANCE COMPOUND**

MOTORSPORT-GRADE CAP COMPOUND THAT MAINTAINS GRIP AS THE TIRE TEMPERATURES HEIGHTEN. LARGE CONTACT PATCH REDUCES SLIP UNDER HEAVY ACCELERATION AND HARD CORNERING THUS INCREASING SUSTAINABLE G-FORCES UNDER LOAD.

## **SUPERIOR ENGINEERING**

TWO LAYERS OF POLYESTER CARCASS PROVIDES A STRONG CASING FOR QUICK STEERING RESPONSE AND UNSURPASSED HANDLING PERFORMANCE.

## **UNIFORM CONSISTENCY**

TWIN INNER GROOVES AND CROSS PATCH SIPING GENERATES POSITIVE FEEDBACK AND TRACTION DURING INCLEMENT WEATHER BY DISPERSING WATER ON IMPACT.




# XCOMP H/P



**INNER AREA**  
Twin inner grooves and cross patch siping generates positive feedback and traction during inclement weather by dispersing water on impact.

**OUTER AREA**  
Large contact patch reduces slip under heavy acceleration and hard cornering thus increasing sustainable g-forces under load.

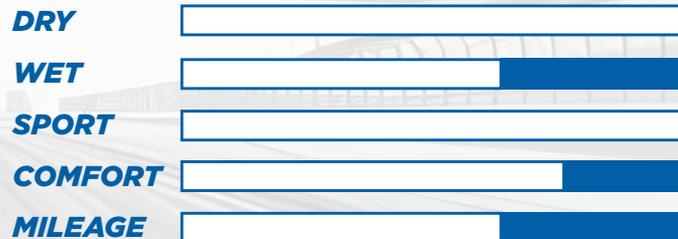

<b>SIZE</b>	<b>245 - 355</b>
<b>ASPECT RATIO</b>	<b>25 - 35</b>
<b>RIMS</b>	<b>18 - 21</b>
<b>SPEED INDEX</b>	<b>Y - (Y)</b>
<b>UTQG</b>	<b>200 AA A</b>





**H/P** | FRONT: 255/30ZR20 XL REAR: 355/25ZR21 XL



# XCOMP H/P SIZES AND SPECS

TIRE SIZE	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32NDS)	LOAD CAPACITY (S/D) LBS
205/50ZR15 89W	23.1	8.9	8	1297
225/45ZR15 87W	23.0	8.4	8	1201
245/40ZR17 95W	24.7	9.8	8	1521
255/40ZR17 98W	25.0	10.2	8	1653
245/40ZR18 97Y XL	25.7	9.8	9	1609
265/35ZR18 97Y XL	25.3	10.7	9	1609
275/35ZR18 99Y XL	25.6	10.9	9	1709
315/30ZR18 99Y XL	25.5	12.6	9	1709
245/35ZR19 93Y XL	25.8	9.8	10	1433
295/35ZR19 104Y XL	27.1	11.9	10	1984
305/35ZR19 102Y SL	27.4	12.3	10	1874
315/30ZR19 100Y SL	26.5	12.6	10	1764
245/30ZR20 90Y XL	25.8	9.8	10	1323
245/35ZR20 95Y XL	26.8	9.8	10	1521
255/30ZR20 92Y XL	26.1	10.2	10	1389
265/35ZR20 99Y XL	27.3	10.7	10	1709
275/35ZR20 102Y XL	27.6	10.9	10	1874
305/30ZR20 103Y XL	27.2	12.3	10	1929
315/35ZR20 110Y XL	28.7	12.6	10	2337
345/30ZR20 106Y SL	28.2	13.8	10	2094
265/35ZR21 101Y XL	28.3	10.7	10	1819
305/30ZR21 104Y XL	28.2	12.3	10	1984
325/25ZR21 102Y XL	27.4	13.2	10	1874
325/30ZR21 108Y XL	28.7	13.0	10	2205
345/30ZR21 111Y XL	29.1	13.8	10	2403
355/25ZR21 107Y XL	28	14.4	10	2149

UTQG 200 AA A



# XCOMP H/P AS1 SIZES AND SPECS

TIRE SIZE	LOAD INDEX	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32NDS)	LOAD CAPACITY (S/D) LBS
185/65R15 SL	88H	24.5	7.4	10	1235
195/65R15 SL	91H	25.0	7.9	10	1356
205/65R15 SL	94H	25.5	8.2	10	1477
205/55ZR16 SL	91W	24.9	8.4	10	1356
205/60R16 SL	92H	25.7	8.2	10	1389
205/65R16 SL	95H	26.5	8.2	10	1521
215/55ZR16 SL	93W	25.3	8.9	10	1433
215/60R16 SL	95V	26.1	8.7	10	1521
215/65R16 SL	98H	27.0	8.7	10	1653
225/60R16 SL	98H	26.6	9.0	10	1653
205/50ZR17 XL	93W	25.1	8.4	10	1433
215/45ZR17 XL	91W	24.7	8.4	10	1356
215/50R17 XL	95V	25.5	8.9	10	1521
215/55ZR17 XL	98W	26.3	8.9	10	1653
225/45ZR17 XL	94W	25.0	8.9	10	1477
225/50ZR17 XL	98W	25.9	9.2	10	1653
225/55R17 XL	101V	26.8	9.2	10	1819
225/60R17 SL	99H	27.6	9.0	10	1709
225/65R17 SL	102H	28.5	9.0	10	1874
235/45ZR17 XL	97W	25.4	9.3	10	1609
235/50ZR17 SL	96W	26.3	9.7	10	1565
235/55R17 XL	103V	27.2	9.7	10	1929
235/65R17 XL	108V	29.1	9.5	10	2205
245/40ZR17 XL	95W	24.7	9.8	10	1521
225/40ZR18 XL	92W	25.1	9.1	10	1389
225/45ZR18 XL	95W	25.9	8.9	10	1521
225/50ZR18 SL	95W	26.9	9.2	10	1521
235/40ZR18 XL	95W	25.4	9.5	10	1521
235/45ZR18 XL	98W	26.3	9.3	10	1653
235/50ZR18 XL	101W	27.3	9.7	10	1819
235/55ZR18 XL	104W	28.5	9.7	10	1984
245/40ZR18 XL	97W	25.7	9.8	10	1609
245/45ZR18 XL	100W	26.7	9.6	10	1764
225/40ZR19 XL	93W	26.1	9.1	10	1433
225/45ZR19 XL	96W	27.0	8.9	10	1565
225/55R19 SL	99H	28.8	9.2	10	1709
235/40ZR19 XL	98Y	26.4	9.5	10	1653

TIRE SIZE	LOAD INDEX	OVERALL DIAMETER (IN)	SECTION WIDTH (IN)	TREAD DEPTH (32NDS)	LOAD CAPACITY (S/D) LBS
245/35ZR19 XL	93W	25.8	9.8	10	1433
245/40ZR19 XL	98W	26.7	9.8	10	1653
245/45ZR19 XL	102W	27.7	9.6	10	1874
255/35ZR19 XL	96W	26.0	10.2	10	1565
255/45ZR19 XL	104W	28.1	10.0	10	1984
255/50R19 XL	107V	29.1	10.4	10	2149
225/30ZR20 XL	85W	25.4	9.1	10	1135
225/35ZR20 XL	90W	26.2	9.1	10	1323
235/35ZR20 XL	92Y	26.5	9.5	10	1389
245/35ZR20 XL	95W	26.8	9.8	10	1521
245/40ZR20 XL	99W	27.7	9.8	10	1709
245/45ZR20 SL	99W	28.7	9.6	10	1709
245/50R20 SL	102V	29.7	10.0	10	1874
255/35ZR20 XL	97W	27.0	10.2	10	1609
255/40ZR20 XL	101Y	28.0	10.2	10	1819
255/45ZR20 XL	105W	29.1	10.0	10	2039
255/50R20 XL	109V	30.1	10.4	10	2271
265/50R20 XL	111V	30.5	10.9	10	2403
275/30ZR20 XL	97W	26.5	10.9	10	1609
275/35ZR20 XL	102W	27.6	10.9	10	1874
275/40ZR20 XL	106W	28.7	10.9	10	2094
275/55R20 XL	117V	31.9	11.2	10	2833
305/35ZR20 XL	107Y	28.4	12.3	10	2149
315/35ZR20 XL	110W	28.7	12.6	10	2337
235/30ZR22 XL	90W	27.6	9.5	10	1323
245/30ZR22 XL	92W	27.8	9.8	10	1389
255/30ZR22 XL	95W	28.1	10.2	10	1521
265/35ZR22 XL	102W	29.3	10.7	10	1874
265/40R22 XL	106V	30.4	10.7	10	2094
285/45ZR22 XL	114W	32.1	11.2	10	2601
305/40ZR22 XL	114W	31.6	12.3	10	2601
255/30ZR24 XL	97W	30.1	10.2	10	1609
275/25ZR24 XL	96W	29.5	11.1	10	1565
295/35R24 XL	110V	32.1	11.9	10	2337
305/35R24 XL	112V	32.4	12.3	10	2469
275/25ZR26 XL	98W	31.4	11.1	10	1653
295/30ZR26 XL	107W	33.0	11.9	10	2149
305/30R26 XL	109V	33.2	12.3	10	2271

UTQG 420 AA A

# XCOMP H/P AS1

THE LATEST IN ALL-SEASON PERFORMANCE JUST GOT BETTER! THIS NEW ALL-SEASON TIRE IS DESIGNED TO PERFORM AT THE HIGHEST LEVEL IN EVERY CLIMATE CONDITION. IT EXCELS IN WET AND DRY CONDITIONS WITH THE CONFIDENCE TO DRIVE SPIRITLY.

## ASYMMETRIC TREAD DESIGN


ASYMMETRIC TREAD DESIGN FOR OPTIMAL PERFORMANCE IN BOTH DRY AND WET ROAD CONDITIONS

## HIGH PERFORMANCE

OPTIMIZED PERFORMANCE DESIGN: CONFIDENT CORNERING AND EXCELLENT STRAIGHT-LINE STABILITY

## AS1 H/P RIDE CONTROL

OUTSTANDING RIDE CONTROL: TREAD DESIGNED FOR STABILITY AND TRACTION IN ALL-WEATHER CONDITIONS WHILE PROVIDING A QUIET RIDE

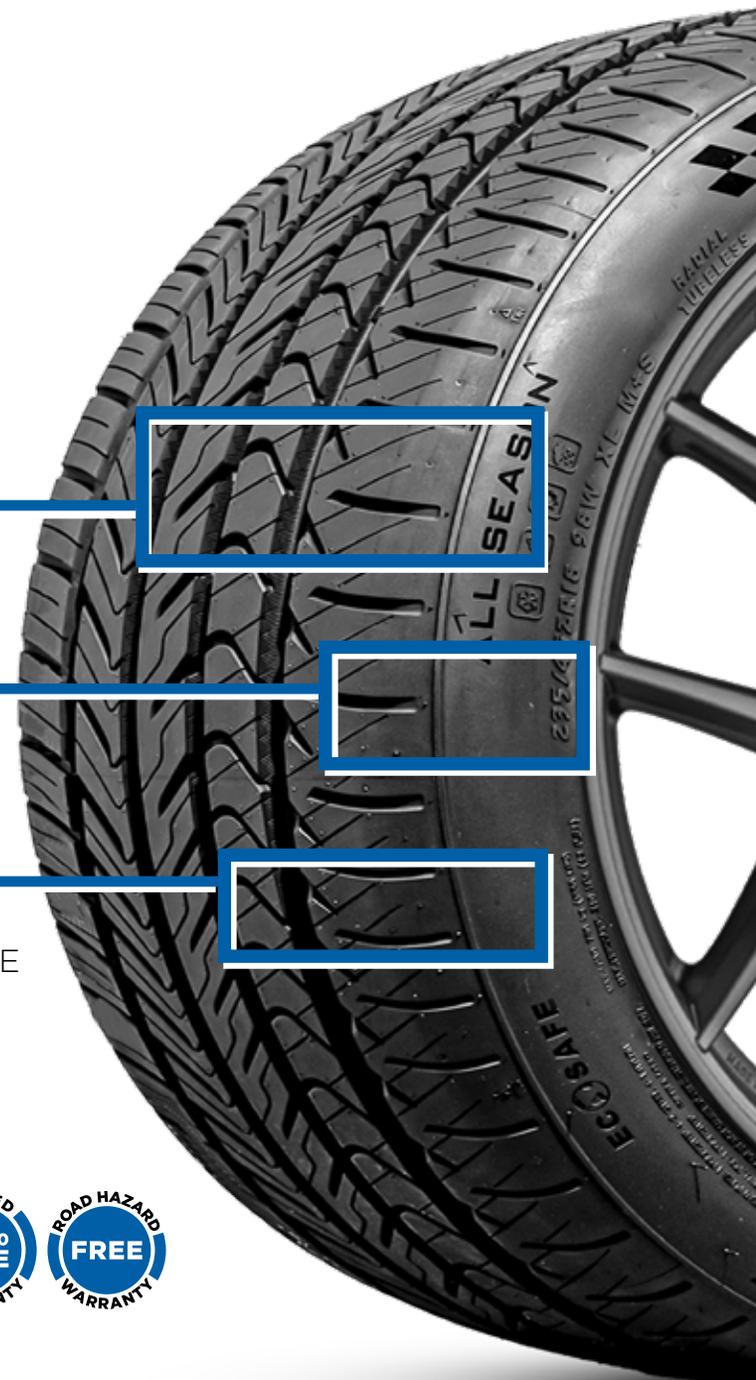

## 100% FREE REPLACEMENT WARRANTY

American Pacific Industries, Inc (API) hereby warrants every new Gladiator X Comp tire for workmanship and material related conditions for the life of the original tread of a new tire less 2/32". The life of the original usable tread ends when the tire tread has worn down with only 2/32" remaining as measured in the fastest wearing groove, at which point the tire is considered to be fully worn out. API will refund the cost of a replacement Gladiator X Comp tire. Applicable taxes on the new tire and costs of mounting and balancing service shall be borne by the owner. All Exclusions listed below void this 100% Free Replacement Warranty. Conditions and coverage are subject to change at any time and without notice.

- A) The Gladiator X Comp tire must be replaced with a comparable new Gladiator X Comp tire by an authorized Gladiator dealer. Copy of invoice will be required.
- B) 100% free replacement applies to new first quality tires. Blemished tires, retreads and road hazard tires are specifically excluded (see Road Hazard Warranty below),
- C) Adjustments on ride complaints or out of round tires are excluded from this warranty if they are worn past 2/32" from the original usable tread of the new tire.

## FREE ROAD HAZARD WARRANTY

Every applicable Gladiator X Comp tire that has been irreparably damaged due to a normal road hazard condition (e.g. irreparable cut, puncture, snag, bruise, or impact break) within the first 25% of the original tread depth and within 2 years from the date of purchase will be replaced free of charge with an equivalent Gladiator X Comp tire. Applicable taxes on the new tire and costs of mounting and balancing service shall be borne by the owner. To be eligible, you must present your original invoice showing date of purchase. All Exclusions listed below void this Road Hazard Warranty. Conditions and coverage are subject to change at any time and without notice. ALL ROAD HAZARD CLAIMS MUST BE SERVICED THROUGH YOUR AUTHORIZED GLADIATOR X COMP DEALER. Applicable X Comp Lines with Road Hazard Warranty: X Comp M/T, X Comp X/T and X Comp A/T, X Comp H/T ASII, X Comp H/P AS1

## SATISFACTION ASSURED

All API passenger and X Comp tires are covered by the 30 Day "Satisfaction Assured" trial period. If, for any reason, other than an excluded condition listed in the respective tire's Standard Warranty, you are not satisfied with your new set of tires within 30 days of date of purchase - or the first 2/32nds of tread wear as measured in the fastest wearing groove (whichever comes first) - you may exchange all or any one of them for the same number of the same design or similar design API manufactured tires. Mounting and balancing are free of charge (excluding online orders). Owner pays all applicable taxes. If you wish to exchange for another set of API manufactured tires that have a higher cost, you must pay the upgrade from the original purchase price, including shipping and all applicable taxes. If you wish to exchange for another set of tires, which is at a lower cost, you will receive a credit for the difference in cost.

This Satisfaction Assurance guarantee only applies to the original new set of manufactured passenger and X Comp tires purchased and not to the replacement tires under this guarantee.

### Administration of the Assured Satisfaction Warranty

Within the 30 days from the date of purchase or the first 2/32nds tread wear as measured in the fastest wearing groove, you must return your tires to the authorized API brand tire dealer where you purchased your tires. You must present the original sales receipt and proof-of-purchase. Reason for dissatisfaction must be explained to the dealer (i.e., appearance, ride, handling, etc.) and noted on the adjustment claim form.

## EXCLUSIONS

- A) All Gladiator warranties are limited to the original purchaser and the original vehicle on which they are mounted, and are not assignable to subsequent purchasers or vehicles.
- B) The warranties listed above are applicable only in the United States and Canada and any tire used or equipped on a vehicle registered or operated outside the United States and Canada are not covered by these warranties.
- C) The following is not covered by the warranties listed above:
  - 1) Tire branded or marked "Non-Adjustable" (N/A) or "Blemished" (Blem), or previously adjusted.
  - 2) Failure, damage or irregular wear due to:
    - a) fire, accident or vandalism;
    - b) mechanical condition of vehicle, including improper alignment, improper inflation, wheel imbalance, faulty shocks or brakes;
    - c) misapplication of tire; or
    - d) alteration of the tire, addition of foreign material, transfers from one vehicle to another or any previous damages and/or repairs.
  - 3) Cost of mounting and balance service.
  - 4) Loss of time or use, inconvenience, or any incidental or consequential damages except as prohibited by law.
  - 5) Adjustment on out-of-balance or out-of-round tire is allowed only during the first 2/32" of the original tread as measured in the fastest wearing groove. A set of all four (4) tires from the same vehicle claimed for out-of-round will not be accepted.
- D) Any Gladiator X Comp tire produced five (5) years from date of manufacture as determined by the DOT/Serial number are not covered under the warranties listed above.

## REPAIRS AND RETREADING: RATING CHANGES AND CAUTIONS

- A) Repaired, retreaded or altered Gladiator tire with "Speed Rating(s)" no longer retain their "Speed Rating".
- B) If the aforementioned tire(s) is repairable, see the recommended repair procedures used by the tire dealer(s) for repairing tubeless passenger car radial tires as detailed and illustrated in the RMA puncture repair procedures.
- C) Repairs must be restricted to the tread area inside a half inch of the sidewall of the tire.
- D) Do not repair any punctures that are larger than 1/4" in diameter.

## OWNER'S OBLIGATIONS

In order to be eligible for Gladiator X Comp Limited Warranty service, the dealer/owner must:

- A) At the time of purchase, the tires must be properly installed, correct air pressure set and the wheels balanced. Every 6,000 miles the tires must be rotated, proper air pressures set and the wheel alignment checked.
- B) Any tire to be adjusted must be presented to an authorized Gladiator dealer.
- C) Present proof of purchase to the satisfaction of the dealer.
- D) Complete and sign a Gladiator Warranty Claim Form which is available at any authorized dealer.
- E) Pay the amount due on a new tire, less the amount of credit, including taxes, mounting and balancing charges or cost of other services ordered.

## DISCLAIMER

This warranty, or any warranty stated or referred to herein, is exclusive and in lieu of any other warranty regarding the quality of Gladiator Tires, whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein. This warranty only applies the 48 contiguous continental United States, Alaska, Hawaii, District of Columbia and Canada.